


AVKOPACK® 1530

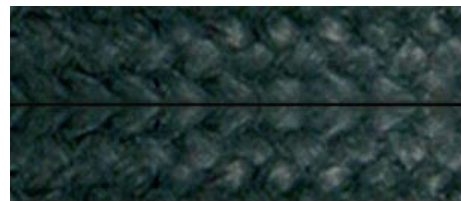

CHARACTERISTICS

Diagonally braided gland packing produced by an advanced-guarded technology for static sealing, made by glass fibre, which is worked and covered with a special graphite system. This combination allows high density and good flexibility, which makes the hermetic ability of AVKOPACK® 1530 better.

Application

AVKOPACK® 1530 is designed for static sealing of lids, man-holes, doors, etc. In facilities, machines and apparatus, cauldrons, furnaces, etc. with high temperature.

Advantages

The packing may be used in conditions with steam, lubricants, heating fluids, remade gases, in heating plants when work with coal dust and other.

Technical parameters

Working temperature:	up to +550°C
Working pressure:	
- for armature:	200 bar
pH:	2 – 12
V:	1,5 m/s
Standard dimensions:	from 4 x 4 mm to 32 x 32 mm

Quality Control

The whole production process is supervised in accordance with the Quality System ISO 9001, ISO 14001, OHSAS 18001.

Human hazardous

Not registered.

The information listed in this technical data sheet is based on our company's trials and experience. AVKO JSC is not to be held responsible for poor installation or application in media combining complexity of factors whose total exceeds the general qualities of the product. Our technical and sales representatives will assist any client in need of a product with a peculiar application.